

Starter


Monolight



Fotografia LOOK BOOK

Mako[®]

The Standard for Lighting.

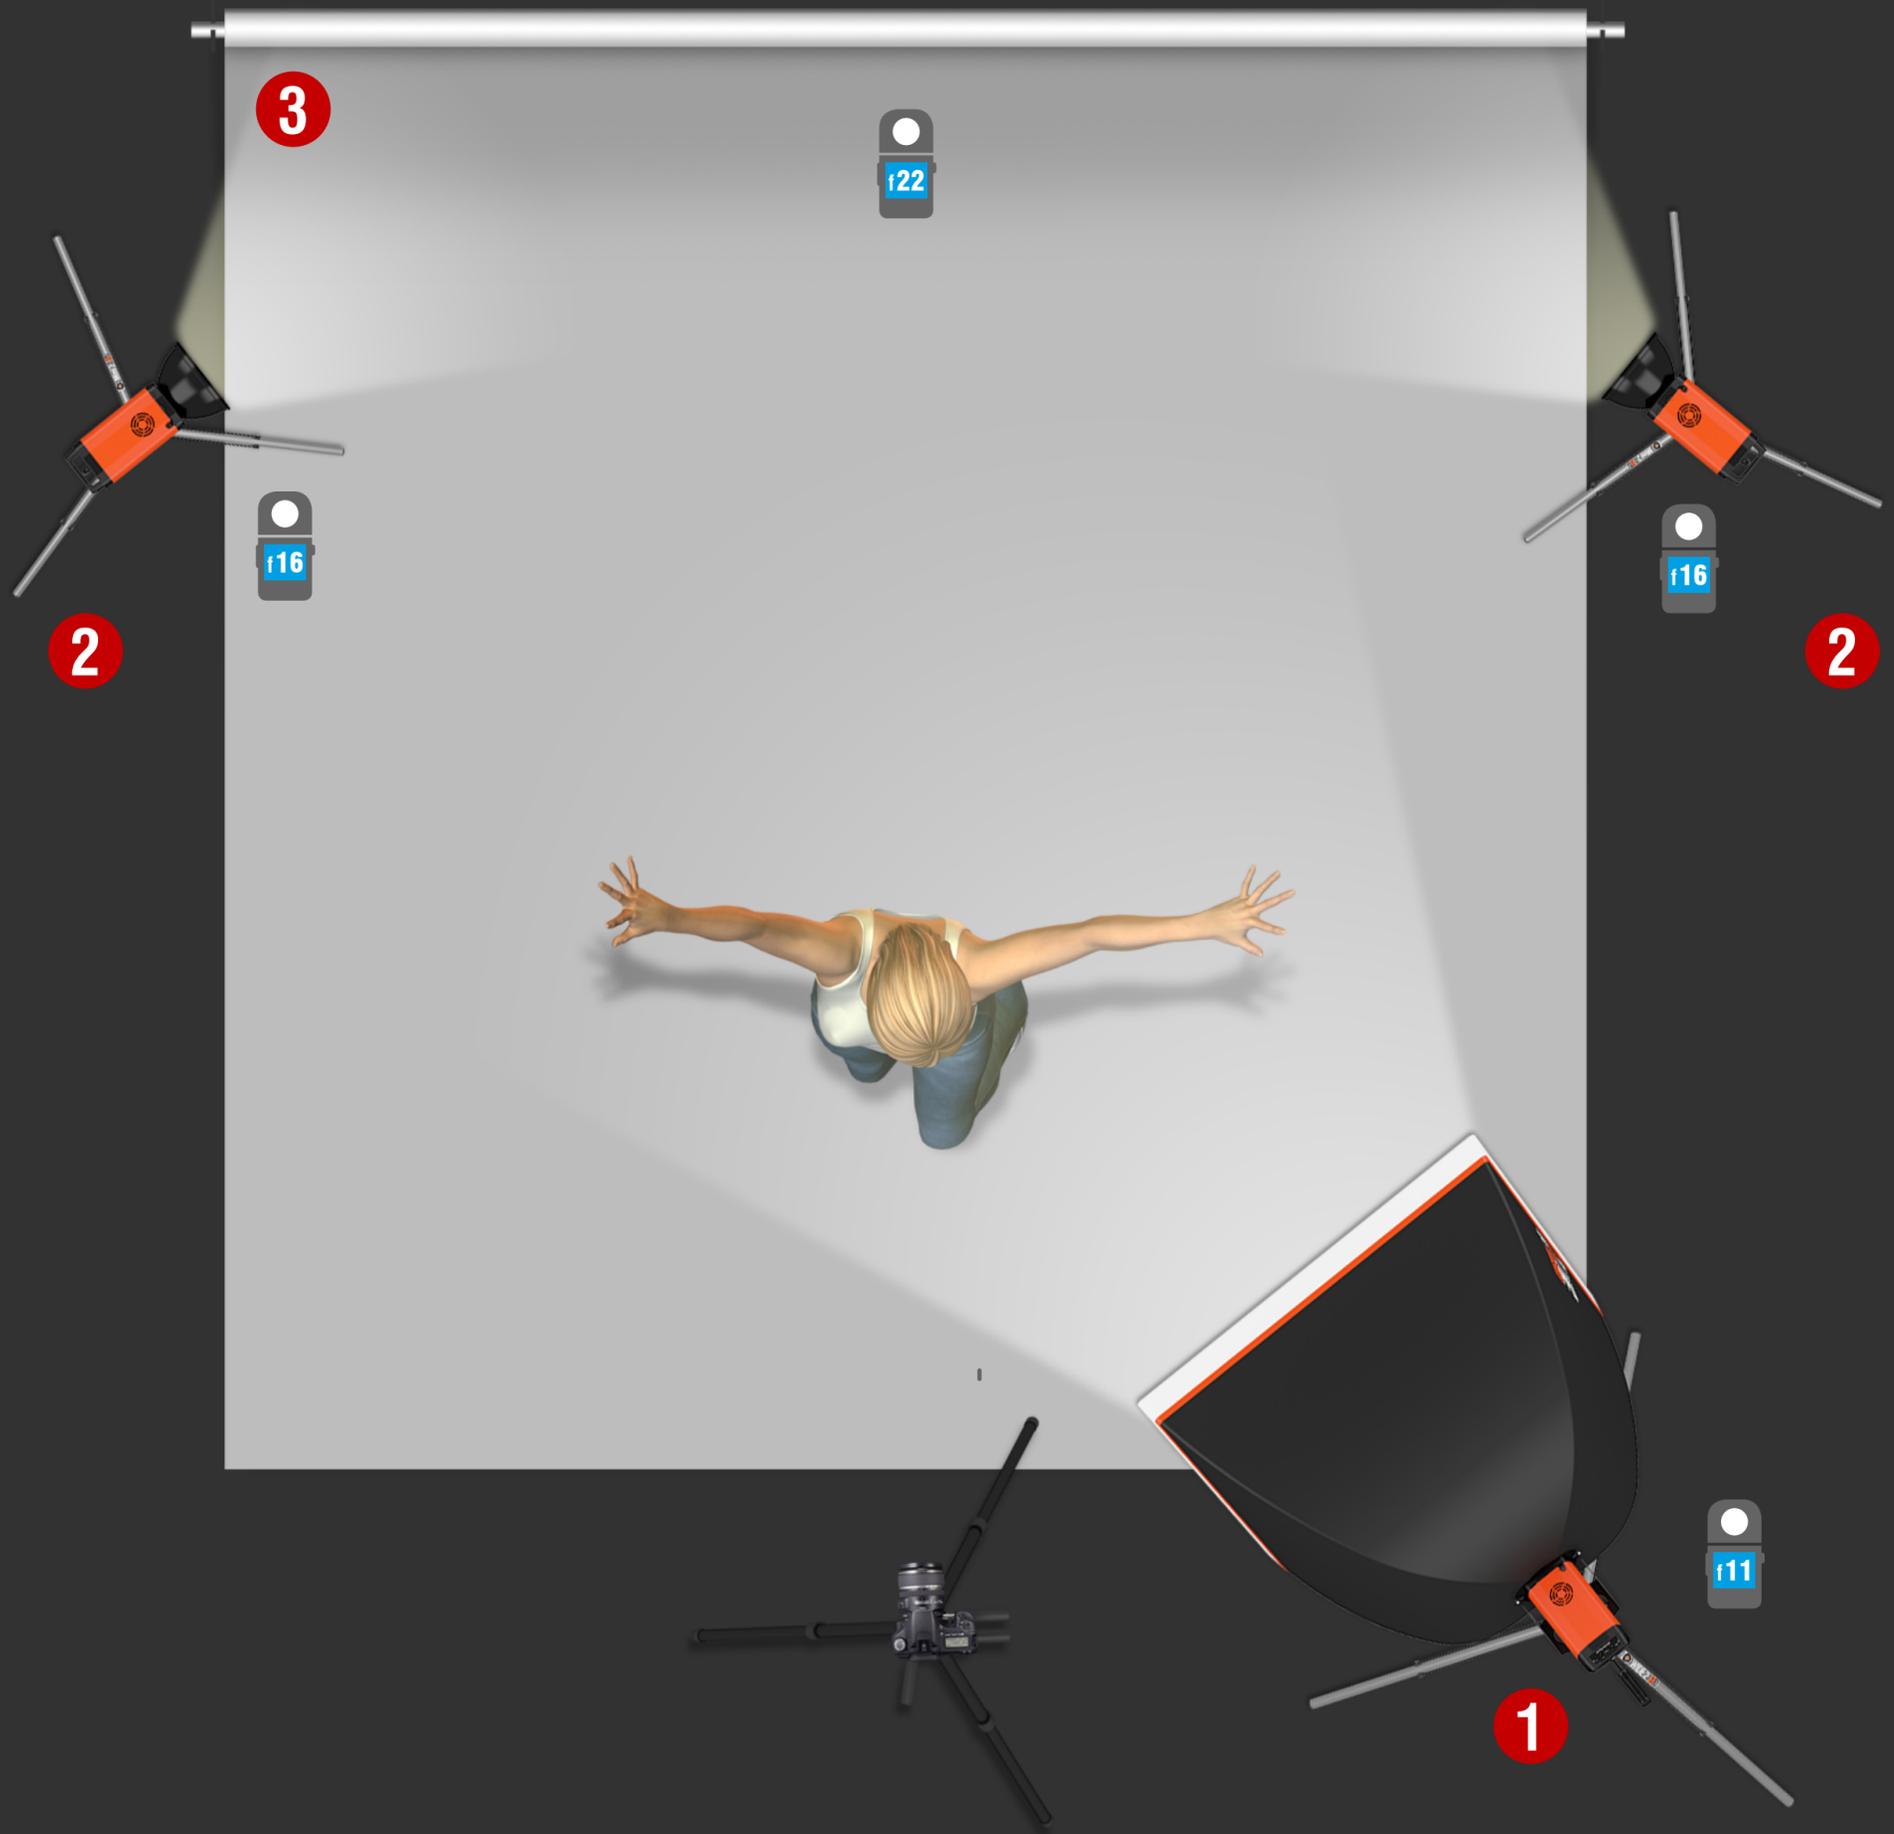

Starter

Monolight



Studio Starter LOOK BOOK

3 Flashes Starter 450 | 1 Softbox Spot 60x80cm G3
2 Refletores Parabólicos Ø280mm G3
1 Tripé Wide-2 | 2 Tripés Mini Max



Starter

Monolight

Starter 450 Power Map


starter 450

200W Full Power Flash

f-stop	EU	WS
45	5.0	200
32.5	4.5	
32	4.0	100
22.5	3.5	
22	3.0	50
16.5	2.5	
16	2.0	25
11.5	1.5	
11	1.0	12,5
8.5	0.5	
8.0	0.0	6,25



Dados obtidos a partir de 1 metro de distância com refletor parabólico. Potência em Watts nominal.

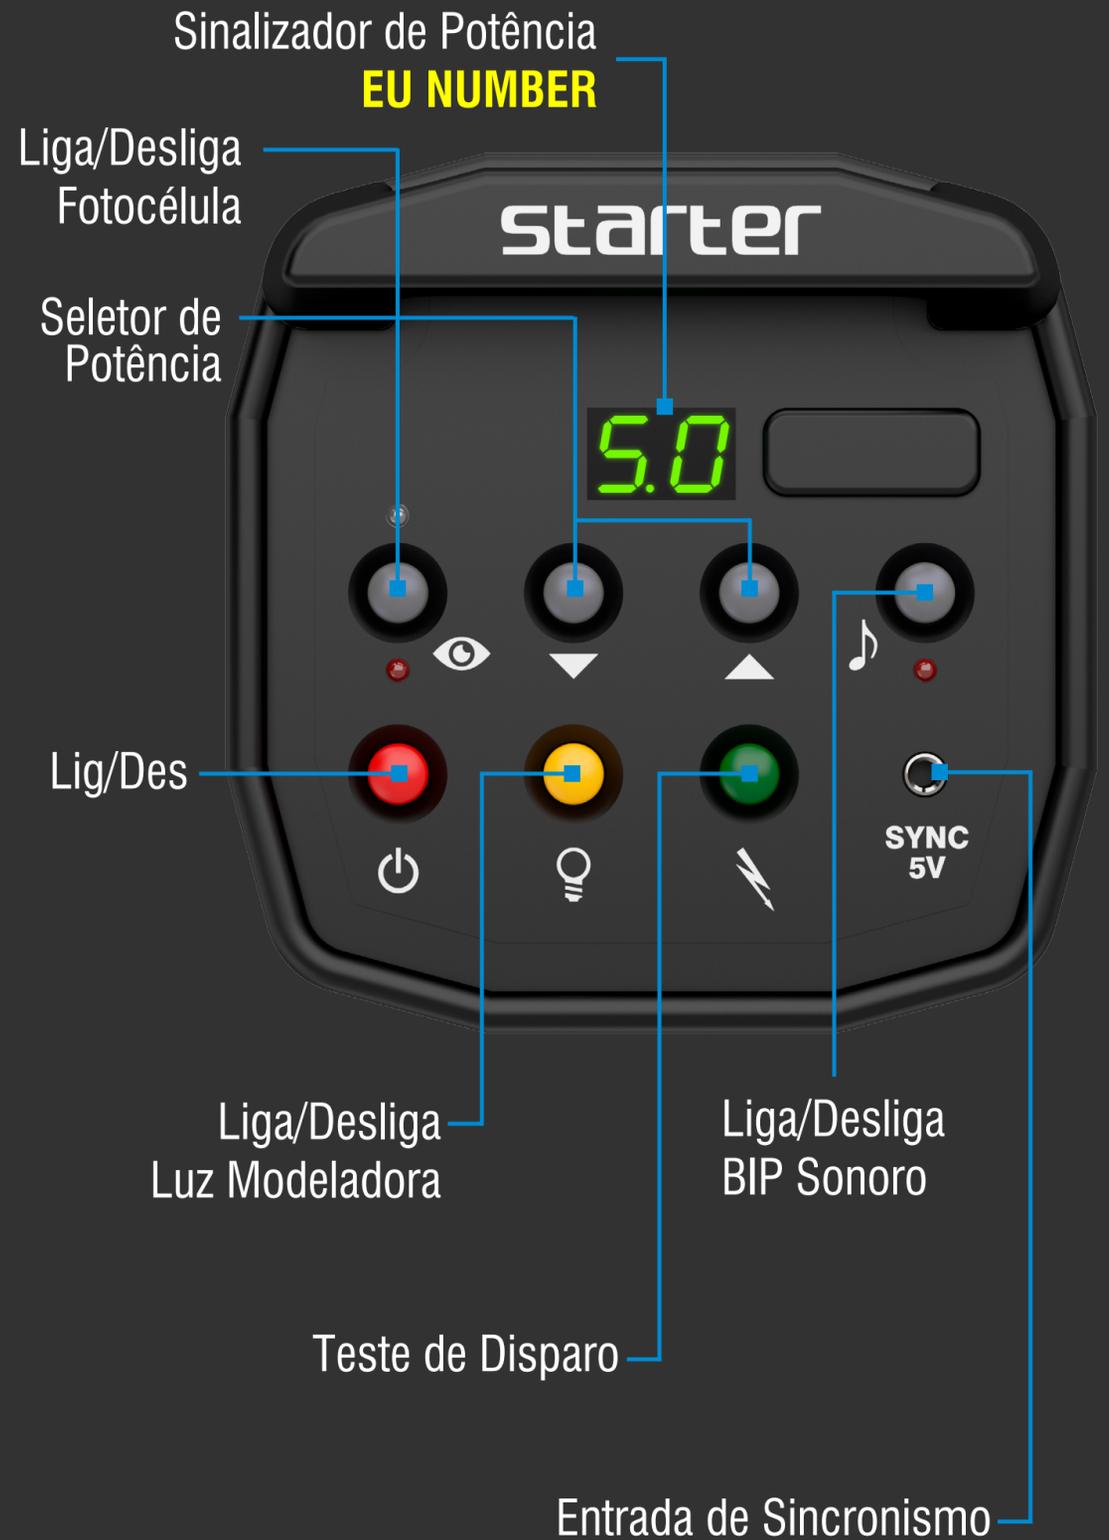

Starter

Monolight

Starter 450 Technical Specifications

starter **450**

Modelo / Cod.	Starter 450 / PFP00526-200
Número Guia-NG / f-Stop	45
Tempo de Reciclo	1,3 seg em potência máxima
Relâmpago T.05 máx./min.	1/2190s - 1/3676s
Lâmpada Flash	Mako Socket System G3-0204
Luz de Modelagem	LED 18W 4.000°K
Temperatura de Cor / Flash	Daylight
Sincronismo	5V
Voltagem	100V ~240V
Fotocélula	Embutida
Display Digital	Sinalizador de Potência
Bip Sonoro	Sinalizador de Carga Completa
Potência	200W
Controle de Carga	6 f-Stop / 11 níveis
Divisão de Carga	Intervalo de 1/2 f-Stop
Peso	1,740Kg
Fusível 5x20mm	7A
Dimensões	12cm x 29cm x 20cm

mako[®]

The Standard for Lighting.

mako[®]
STORE

The logo features the word "mako" in a white, lowercase, rounded sans-serif font. A registered trademark symbol (®) is positioned to the upper right of the "o". A thin, light gray curved line underlines the "mako" text. An orange, rounded rectangular tag is attached to the end of this line, containing the word "STORE" in white, uppercase, sans-serif font.